


TT COMPACT

TT35 | TT40 | TT45



Models		TT35	TT40	TT45
Engine				
Engine power	[hp(CV)]	35	42	47
Rated speed	(rpm)	2000		2300
No. of cylinders		3		
Bore x stroke	(mm)	88.9 x 127	91.4 x 127	
Displacement	(cm ³)	2365	2500	
Air cleaner	(mm)	Wet air cleaner with underhood centrifugal pre cleaner		
Fuel filters		Dual filter with optional water trap		
Fuel tank capacity	(l)	62		
Aspiration		Naturally aspirated		
Transmission				
Type		Constant mesh		
Speeds	(F x R)	8 x 2 and optional 8 x 8		
Gear levers		Side shift		
Forward speed range	(km/h)	2.83 - 31.12	3.25 - 35.79	
Clutch type		Single clutch or optional double clutch with independent PTO		
PTO				
PTO	(rpm)	Standard 540 RPM with Ground Speed PTO and optional 540/540E RPM with Ground Speed PTO		
PTO	(hp)	32.5	37.5	42.41
Hydraulics				
Controls		Position control, drop rate control, mix control, sensitivity knob, tap off and Lift-O-Matic™		
Maximum lift capacity at ball ends	(kg)	1100 or optional 1500		
Max. number of remote valves		2		
Steering				
Mechanical steering and power steering options				
Rear axle				
Type		Epicyclic reduction with straight axle (Heavy duty)		
Brakes				
Type		Wet brakes		
Electricals				
Differential lock		●		
Battery		75 Ah or optional 88 Ah		
Others		7 pin trailer socket, rear work light, halogen work lamps, direction indicator		
Instrument cluster		Analogue panel with rpm meter, digital hourmeter, fuel gauge and water temperature gauge and warning lights for battery charging and oil pressure		
Dimensions & weights*				
A - Wheelbase 2WD	(mm)	1910		
A - Wheelbase 4WD	(mm)	2025		
B - Ground clearance under front axle 4WD	(mm)	370		
C - Overall length incl. front weight 2 & 4WD	(mm)	3440		
D - Overall width 2 & 4WD	(mm)	1700		
E - Height to top of Exhaust 2 & 4WD	(mm)	2300	2300	2275
F - Height to top of steering wheel 2 & 4WD	(mm)	1620	1620	1570
Weight without ballast 2WD	(kg)	1645	1645	1660
Weight without ballast 4WD	(kg)	1738	1738	1760

● Standard * Above dimensions are based on tractors with 12.4x28 rear tyre size expect 13.6x28 size on TT45 2WD

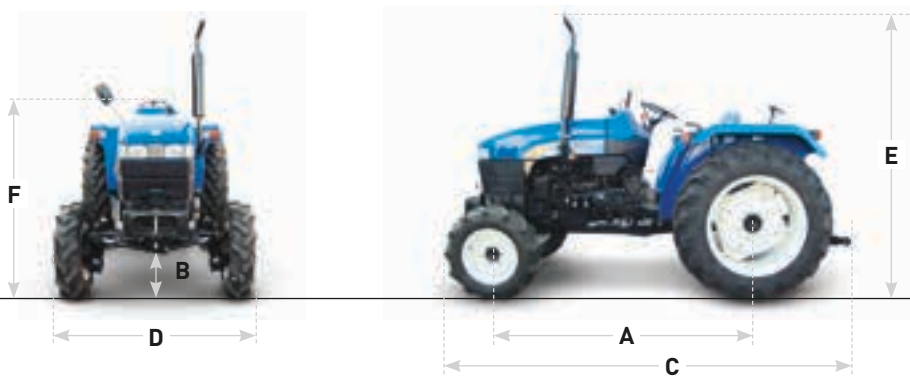

www.newholland.com/za

The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. Bts Adv. - Printed in Italy - 05/18 - (Turin) - RSA8166N/INB